

InformationManagement ProcessMonitoring QualityAssurance





Electronic feeler gauge

Ideas for your success

Fast and Easy Measurement



We developed the gapMaster[®] for gaps, in which laseroptical or other measuring methods fail due to poor accessibility, reflective surfaces or choice of material.

Its thin measuring blade can enter deep into gaps, which are out of visual range. Helpful will this be for example in the measurement on rotary machines and pumps, as well as in the determination of internal contours.

The tactile sensor is independent of material and surface and has low measuring forces.

The handy mobile device uses a touchscreen for display and operation. For the fast and reliable recording of measured values, test plans with semi-automatic processing can be configured.


The data are saved locally and can be automatically transfered via USB or WiFi.

Flexible Sensor Variations




Different tips with either line or point contact will always ensure correct measurement. To suit every application, our sensors can be angled in different directions.

Straight tubes shafts, flexible blades or pliable goosenecks will meet every requirement.



The flexible sensor blade can be as long as 500 mm. It will enter deep gaps even behind curves out of the visual range.

The lower measuring limit with particular sensors is 0.2 mm.



The sensor handling can be enhanced with additional extensions like individual stops or guides.

This way the operater influence can be almost completely eliminated.

Different types of sensors for your special requirements

1001 Applications

Fields of application and examples



Aircraft construction

- Comprehensive documentation
- Handy mobile device for every application



Roller nips

- Independent of material and Surface
- Low measuring forces, ideal for sensitive surfaces



Wind generators

- Detection up to500 mm depth
- Accurate sheetpackage measurement for full generatorpower



Turbines and fans

- Minimum value recording with axial and radial measurement
- Feature groups for a high number of measuring points



Automotive industry

- Useful for difficult to access interior and exterior
- Optimised for mobile use without surface influence



Mechanical engineering

- Good accessibility for all mounting gaps
- Recording of complete gap contours, even in spots difficult to measure



Wooden components

- Measurement recordings without material influence
- Contourmeasurement of laser cuts



Sheet metal forming

- Exchange of gauges and spies with a single sensor
- Quantitative statements for manufacturing

MFP GM1	04 GapMaster V5.	2.0			:
Sensor: 2060K14 Kal.dat.: 14.03.2018 16:16					
ONLINE- MESSUNG	AUFTRAGS- MESSUNG	AUFTRÄGE	AUFTRÄGE PRÜ		EINRICHTEN
5.30mm					
Auftrag:		Prüfp	lan:	1	ſest
001 Status Prio NIO 01	above133 Istwert Sollw 5.31 1.2	vert Abweichun	9		Notiz
002 Status Prio	right1554 Istwert Sollw 3.95 0.5		9		Notiz
003 Status Prio	below253	vert Abweichun	,		Notiz
004 Status Prio 10 01	left8545 Istwert Sollw 1.09 1.0			Wdh	Notiz
Auftrag Auswahl	Auftrag Speichern	Auftrag Export	Mess Lösc		Alle Löschen
<pre> (</pre>		^{고)} 적))	:	12	2:21 🛙

Job View

Depending on the measuring task and process, various detection strategies are used. We aim to make your measured value recording as reliable, as accurate and as fast as possible.

For default measurements the sensor is inserted into the gap and the current measured value at the desired position is transfered as a single value into the test protocol. The transfer can take place on the sensor, the cable box or the touchscreen as required.

To accelerate the measurement process, the software handle automatically switches to the next feature after the transfer.


Different software variants and measurement curve evaluations are used according to customer requirements. Every sensor can be adapted to your specific measuring tasks.

Variable versions

The sensors of the gapMaster[®] are interchangeable via plug connections. Depending on your requirements, you can use the sensor with its grip, install it in devices, clamp it in the gap or use other hardware variants.

Whether mobil or stationary, whether Android[®] or Windows[®], the gapMaster[®] offers the right equipment for every application.

Our specialists will be pleased to advise you and show you the possibilities for your special measurement task.

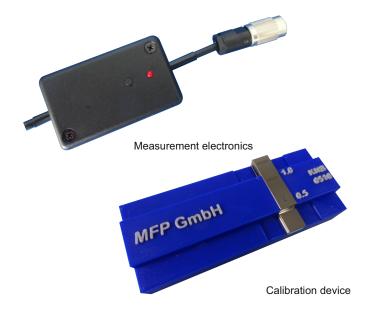

Technical changes reserved

MFP Messtechnik und Fertigungstechnologie GmbH

An der Corvinuskirche 22-26 D-31515 Wunstorf

Tel.: +49 5031 13790

Fax: +49 5031 15687

E-Mail: info@mfp-online.de

www.mfp-spaltmessung.de